

ADVANCED DAYLIGHT MODELLING OF FAÇADE SYSTEMS FOR ENERGY AND COMFORT ANALYSIS

David Geisler-Moroder, Wilfried Pohl
Bartenbach



Eleanor S. Lee, Taoning Wang
Lawrence Berkeley National Laboratory



14th Conference on Advanced Building Skins
28 -29 October 2019, Bern



founded 1976 (Prof. Dr. h.c. Ing. Christian Bartenbach)

Independent from manufacturers

90 employees, ca. 40 in lighting design

Locations: Aldrans, Austria

more than 10.000 projects worldwide





DAYLIGHTING DESIGN

ARTIFICIAL LIGHTING DESIGN

COMPLETE LIGHTING SOLUTIONS

RESEARCH & DEVELOPMENT

MATERIALS CONSULTATION

MODEL BUILDING & VISUALISATION

OUR RANGE OF SERVICES

Tailored to suit your needs



ARTIFICIAL LIGHTING DESIGN
COMPLETE LIGHTING SOLUTIONS



ARTIFICIAL LIGHTING
DAYLIGHTING DESIGN
MODEL BUILDING & VISUALISATION



ARTIFICIAL LIGHTING
DAYLIGHTING DESIGN
RESEARCH & DEVELOPMENT
MODEL BUILDING & VISUALISATION
MATERIALS CONSULTATION


OUR RANGE OF SERVICES

Tailored to suit your needs

IEA SHC Task 61 / EBC Annex 77

Integrated Solutions for Daylight and Electric Lighting

From component to user centered system efficiency

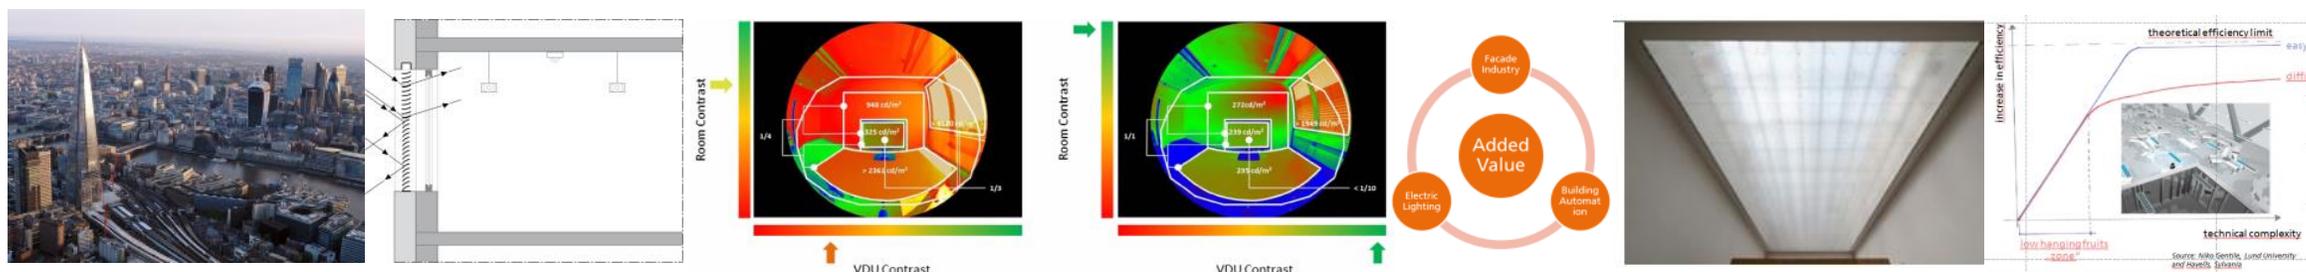

AUSTRALIA · AUSTRIA · BELGIUM · BRAZIL · CHINA · DENMARK · GERMANY · JAPAN · NETHERLANDS · NORWAY · SINGAPORE · SLOVAKIA · SWEDEN · SWITZERLAND · UNITED KINGDOM · USA

IEA SHC Task 61 / EBC Annex 77

Integrated solutions for daylight and electric lighting

From component to user centered system efficiency

Operating Agent: J. de Boer, Germany

Subtask A

B. Matusiak, Norway
User Perspective,
Requirements

Subtask B

M. Fontoynt,
Denmark
Integration and
optimization of
daylight and electric
lighting

Subtask C

D. Geisler-Moroder,
Austria
Design support for
practioners
(Tools, Standards,
Guidelines)

Subtask D

N. Gentile, Sweden
W. Osterhaus,
Denmark
Lab and field study
performance tracking

Joint Working Group

Evaluation method for integrated lighting solutions

Virtual reality (VR) based Decision Guide

Subtask C: Design Support for Practitioners

Objective


Focus on the application of technical innovations in the field of integrated lighting solutions in practitioners' workflows. Bring findings onto the desktops of designers by integration into widely used software tools, standards and codes, and design guidelines.

C.1 Review of state of the art design workflows




C.2 Standardization of BSDF daylight system characterization

C.3 Spectral sky models for advanced daylight simulations


C.4 Hourly rating method for integrated solutions

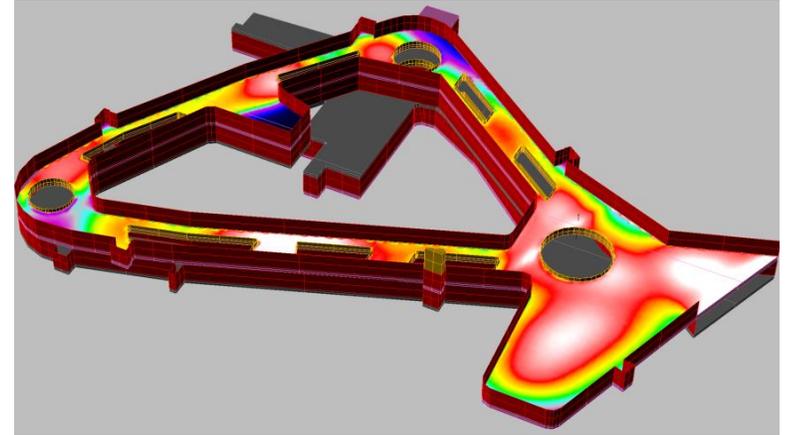


BSDF?

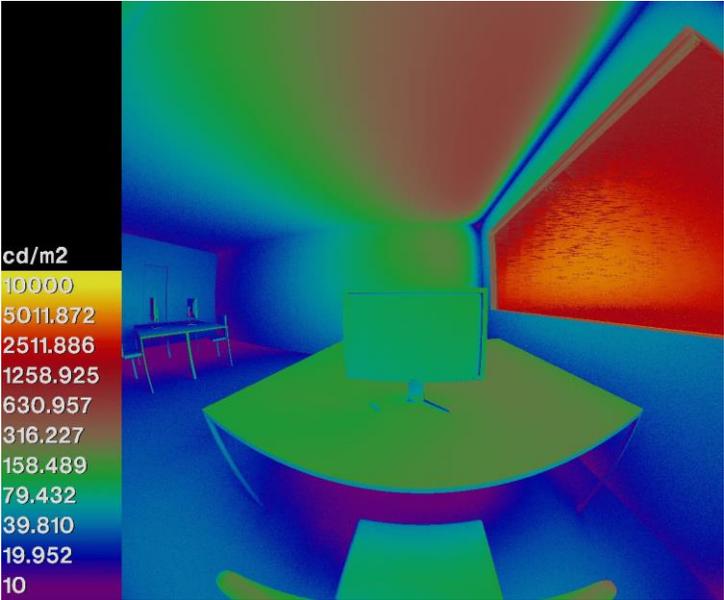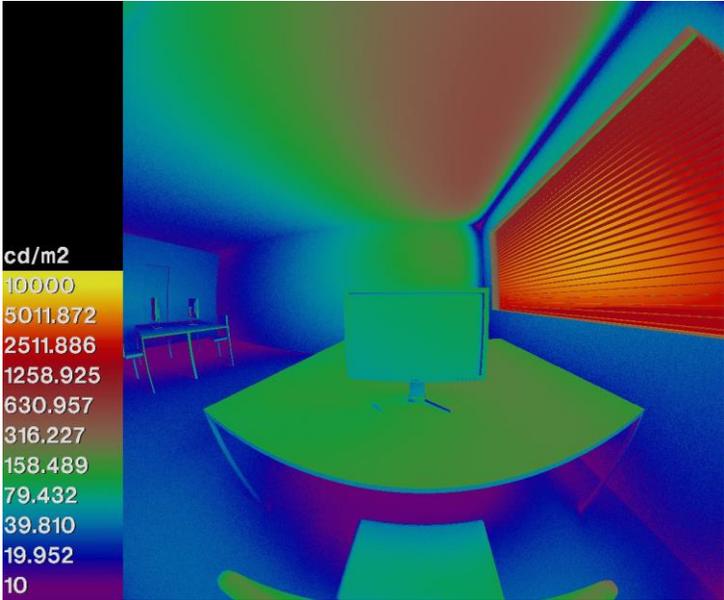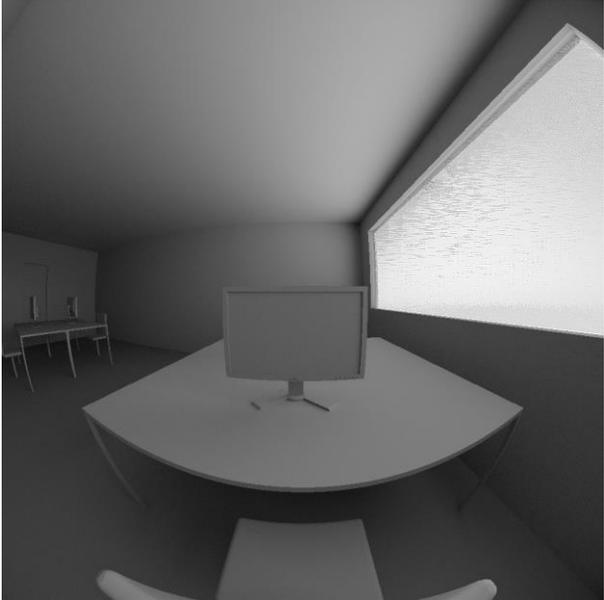

BSDF – Standardization

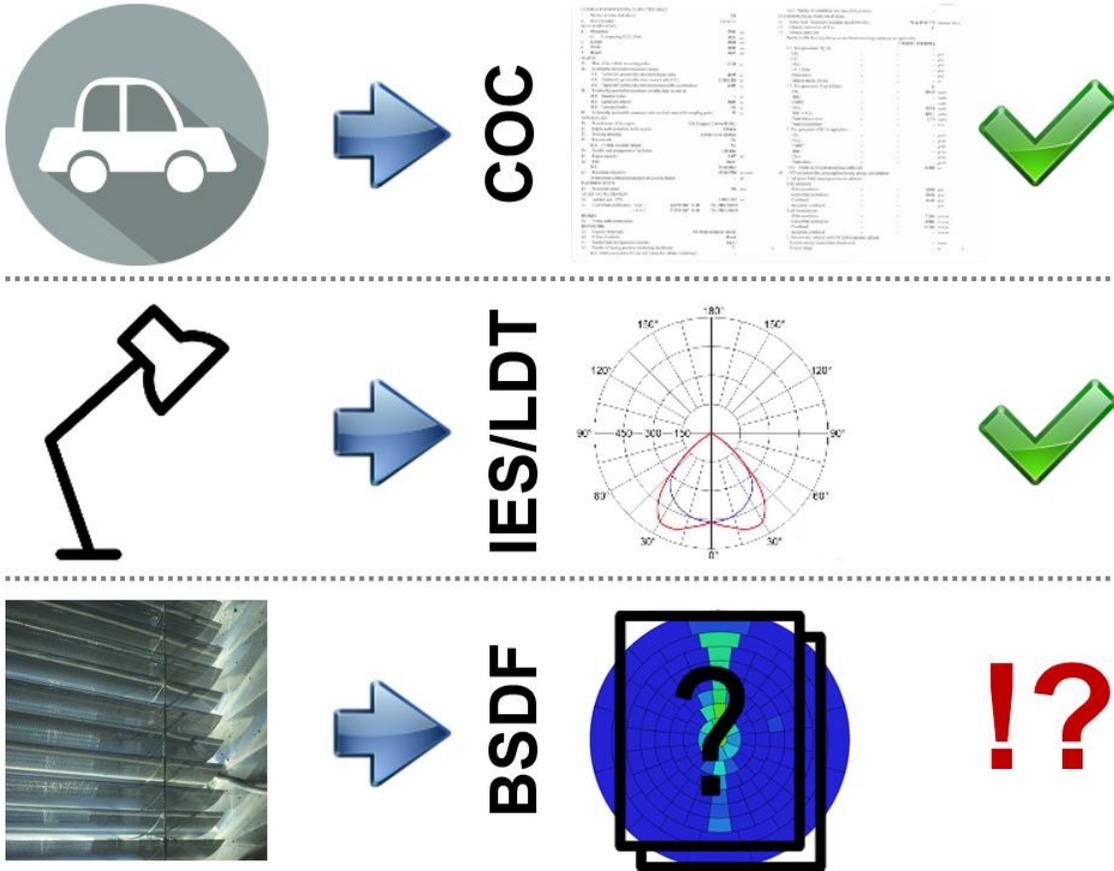


Annual Daylight Simulation (i): Three-Phase-Method

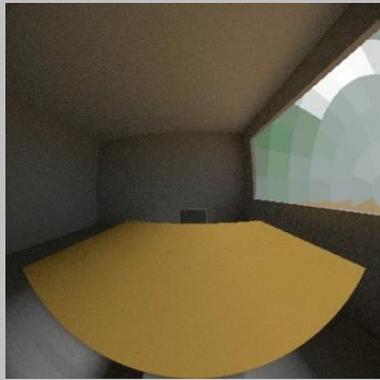


I
result

=

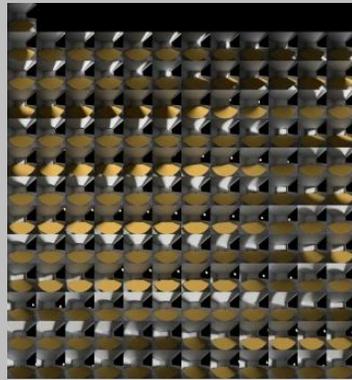


V
view matrix

*

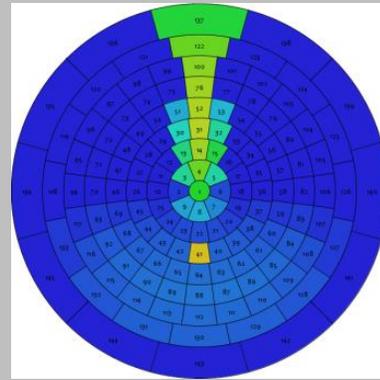


T
BSDF

*

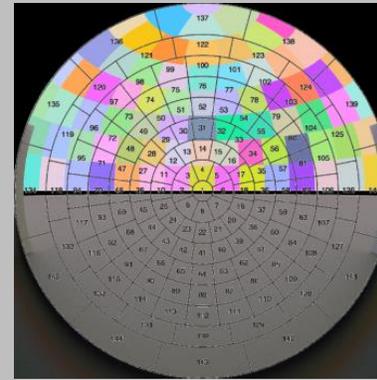


D
daylight matrix

*

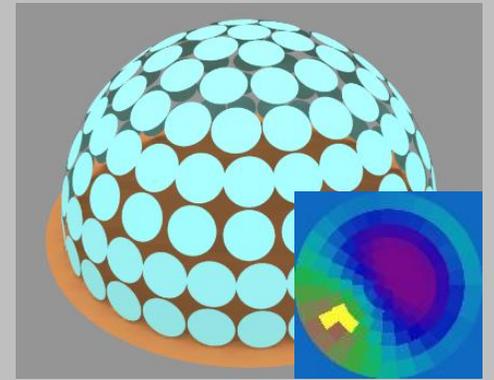


S
sky distribution

Annual Daylight Simulation (ii): Five-Phase-Method

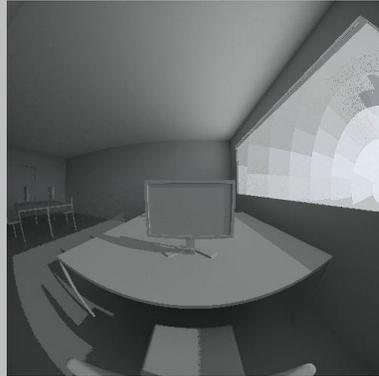



=

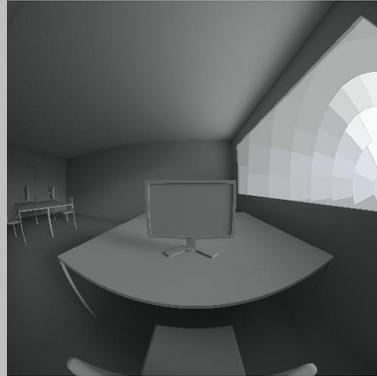


-




+

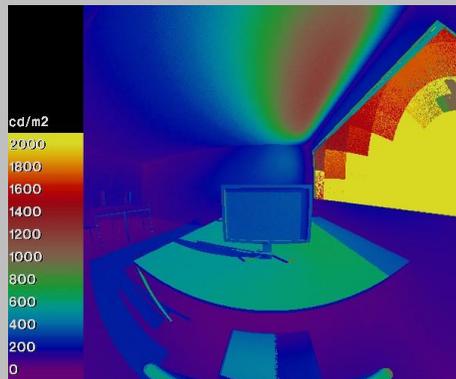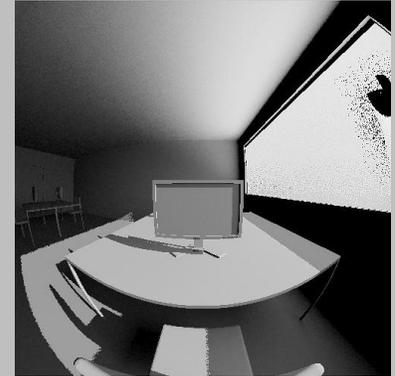


=

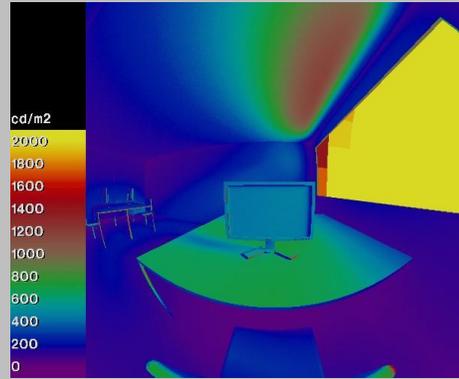

-

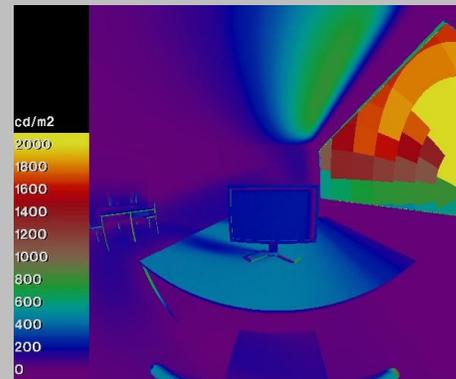

+

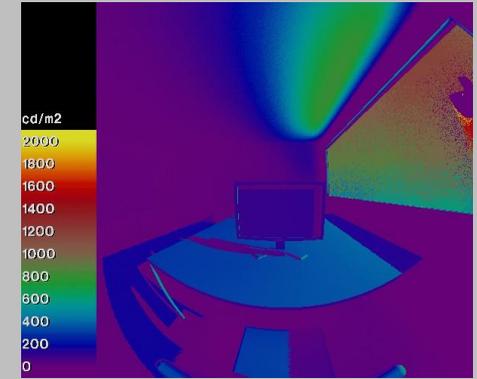


Five-Phase-Method



Three-Phase-Method

Three-Phase direct


accurate direct (tt 5)





BSDF – Metrics – Methods

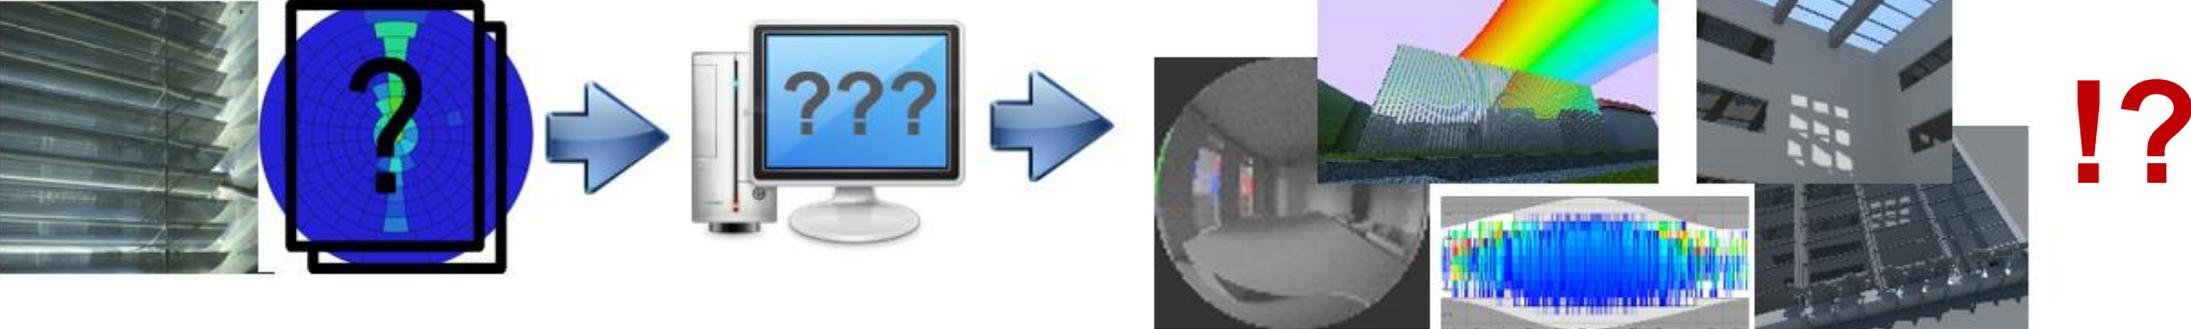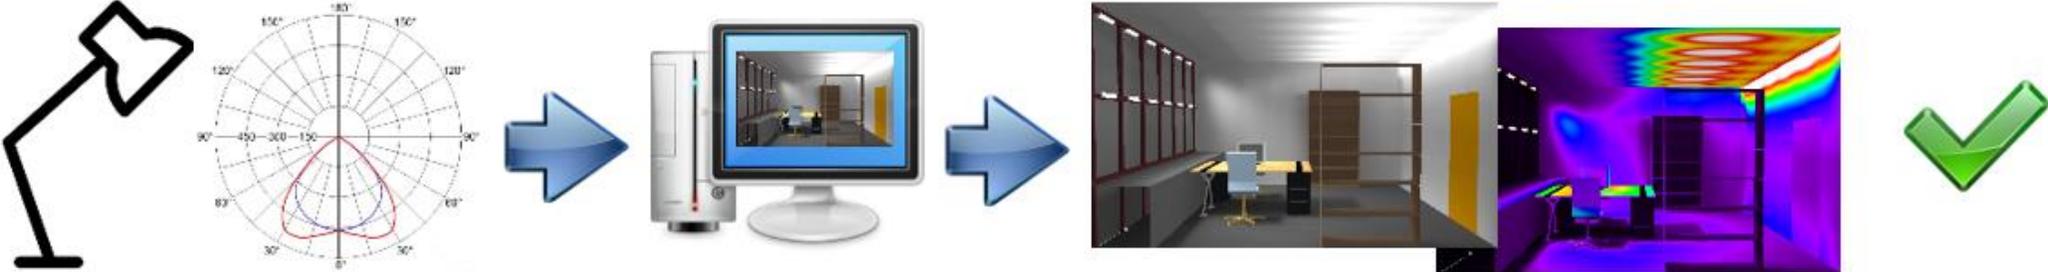



Sensitivity Analysis

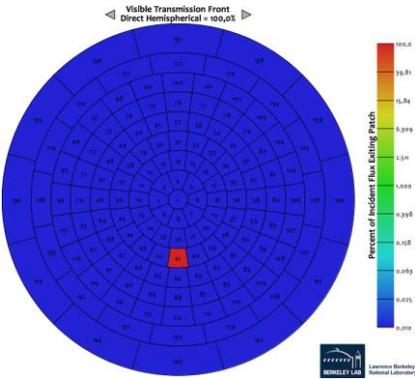



Glazing

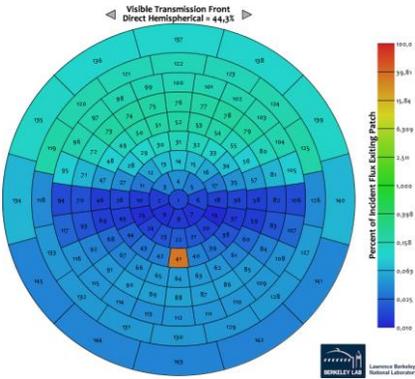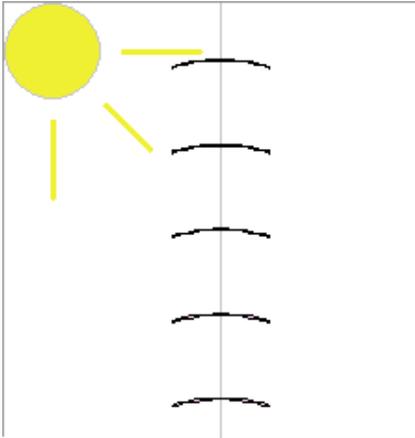

Blinds, 00 deg tilt






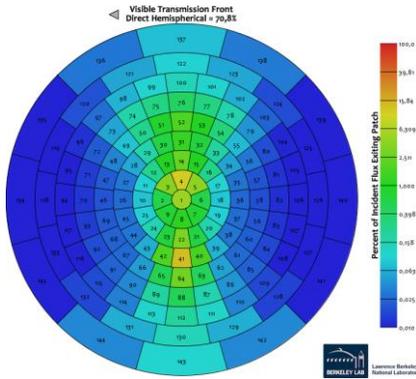
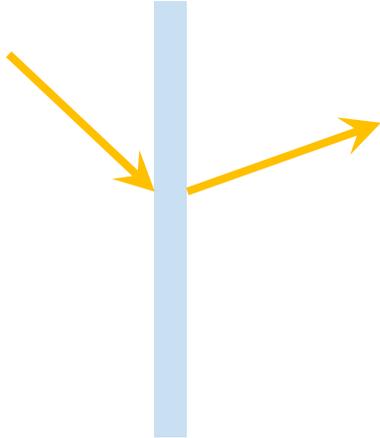


Daylight redirecting film

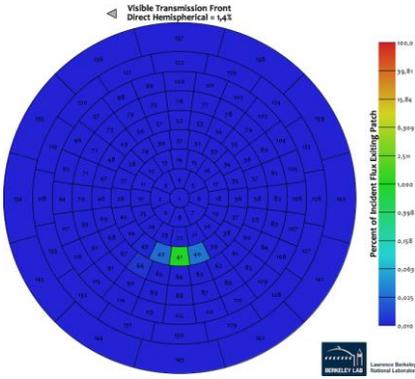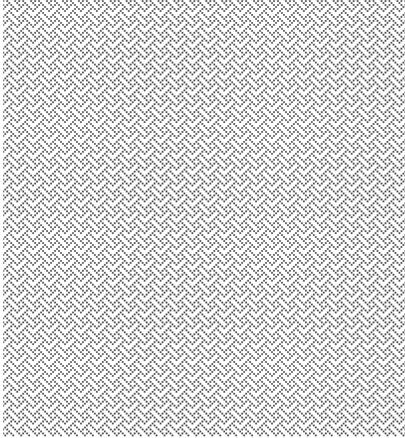


Fabric


Sensitivity Analysis

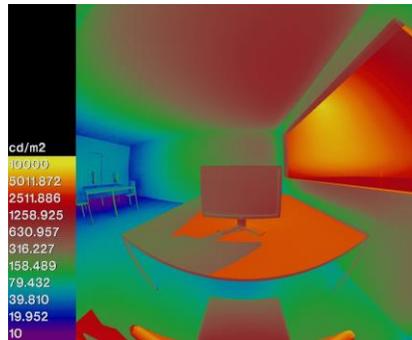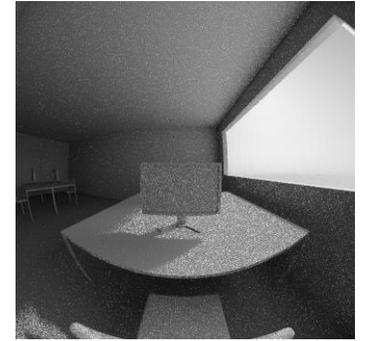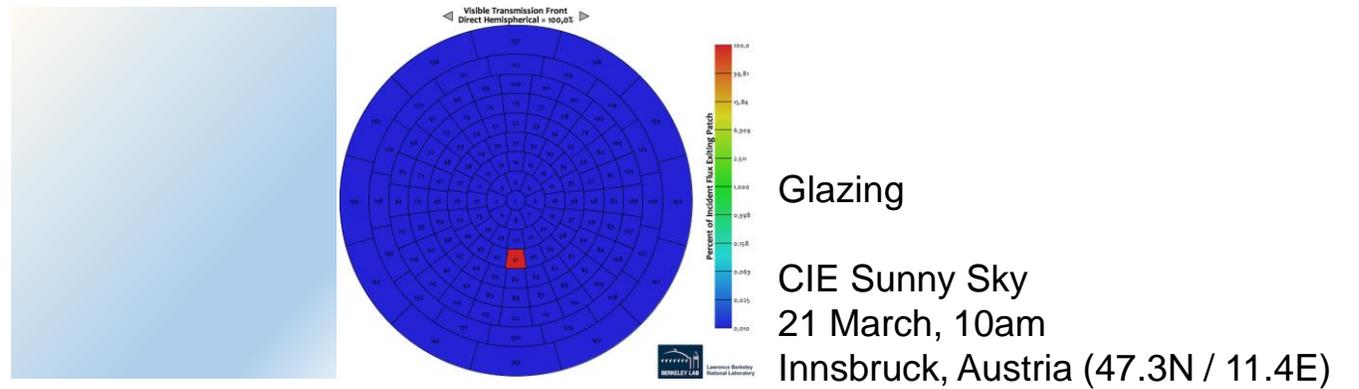


Geometry
Ev 26980 lx
DGP 1.00

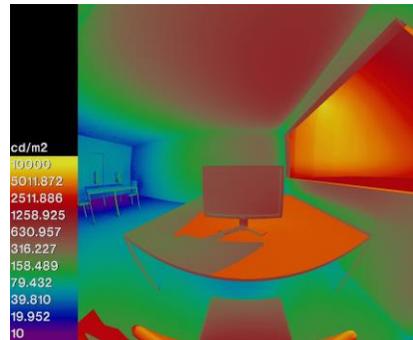


Klems aBSDF
Ev 27420 lx
DGP 1.00

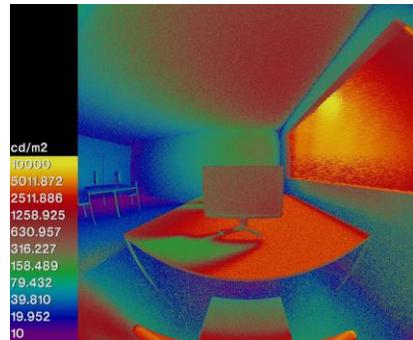

Klems BSDF
Ev 19320 lx
DGP 1.00


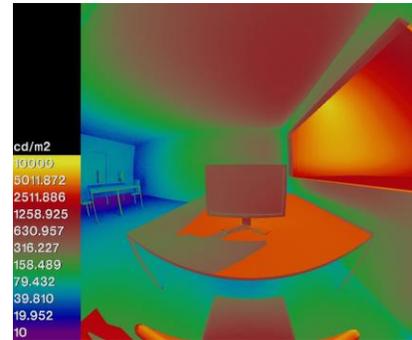


tt46 aBSDF
Ev 27000 lx
DGP 1.00

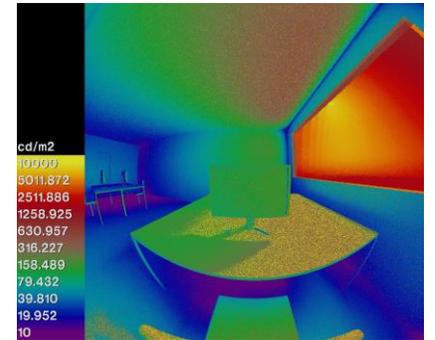

tt46 BSDF
Ev 19790 lx
DGP 1.00



Sensitivity Analysis

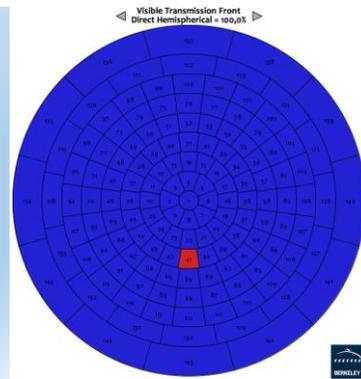



Glazing

CIE Sunny Sky
21 March, 10am

Innsbruck, Austria (47.3N / 11.4E)

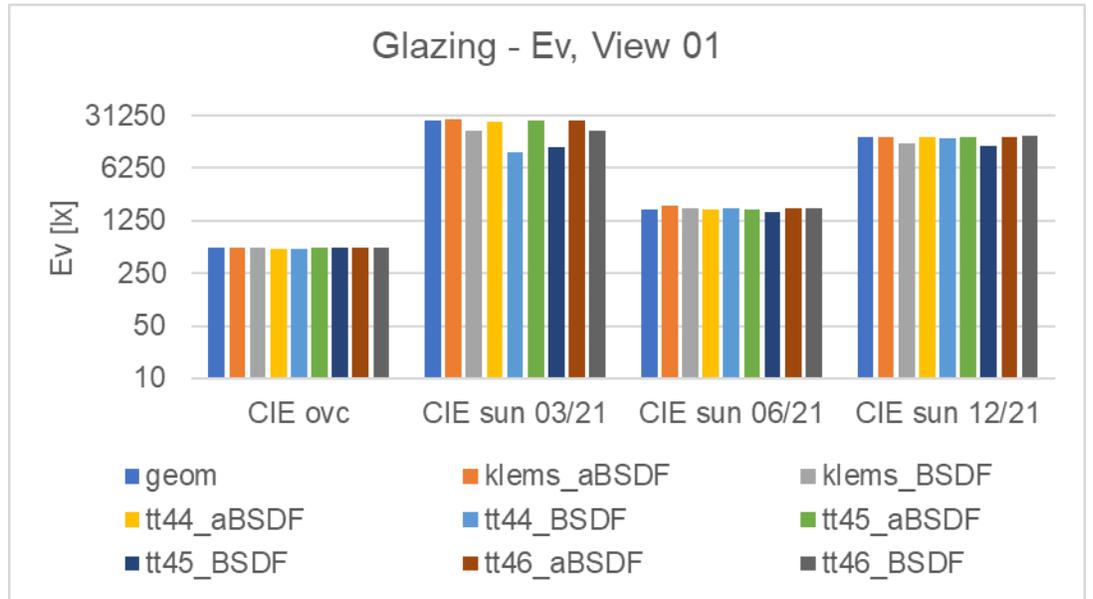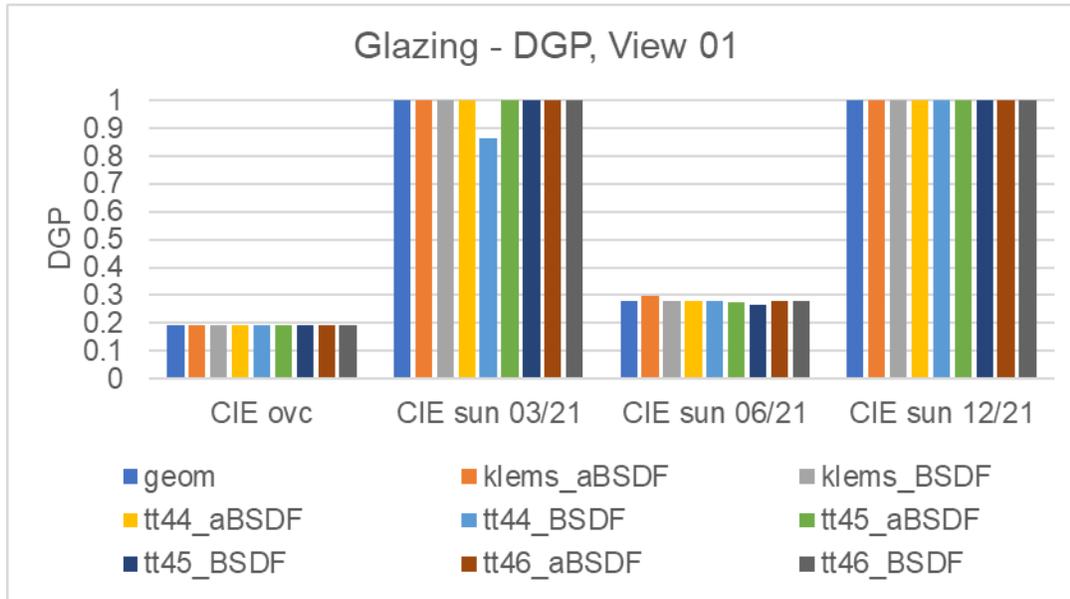







Sensitivity Analysis

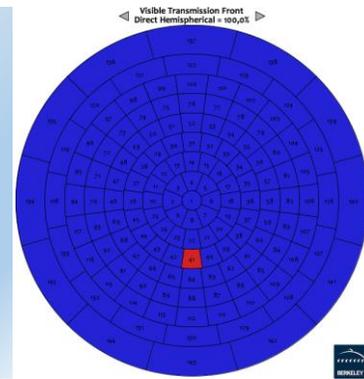


Glazing

CIE Sunny Sky
21 March, 10am


Innsbruck, Austria (47.3N / 11.4E)

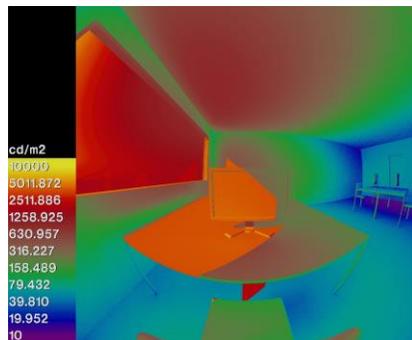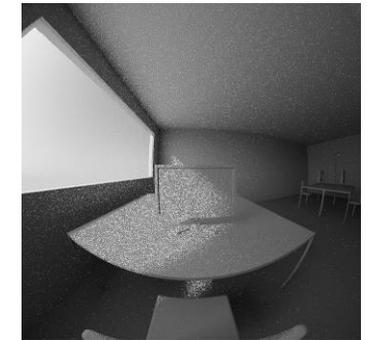


Geometry
Ev 3670 lx
DGP 0.40

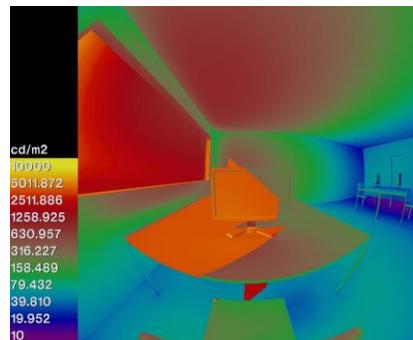


Klems aBSDF
Ev 3700 lx
DGP 0.40

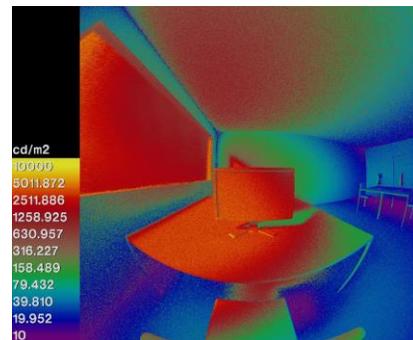

Klems BSDF
Ev 3740 lx
DGP 0.40


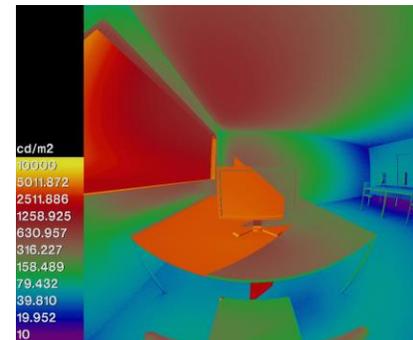


tt46 aBSDF
Ev 3680 lx
DGP 0.40

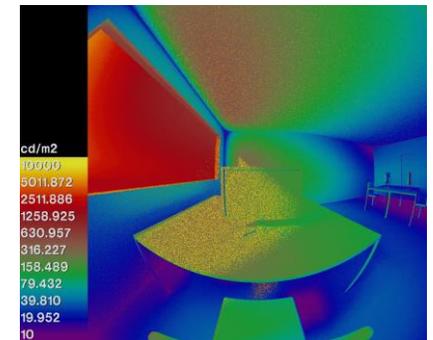

tt46 BSDF
Ev 3275 lx
DGP 0.39

Sensitivity Analysis

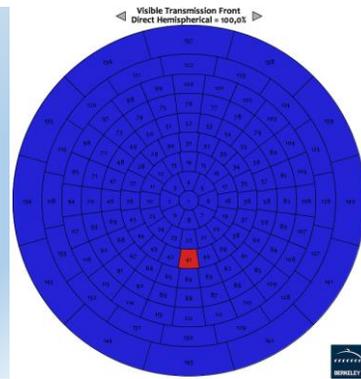


Glazing


CIE Sunny Sky
21 March, 10am

Innsbruck, Austria (47.3N / 11.4E)



Glazing - DGP, View 02

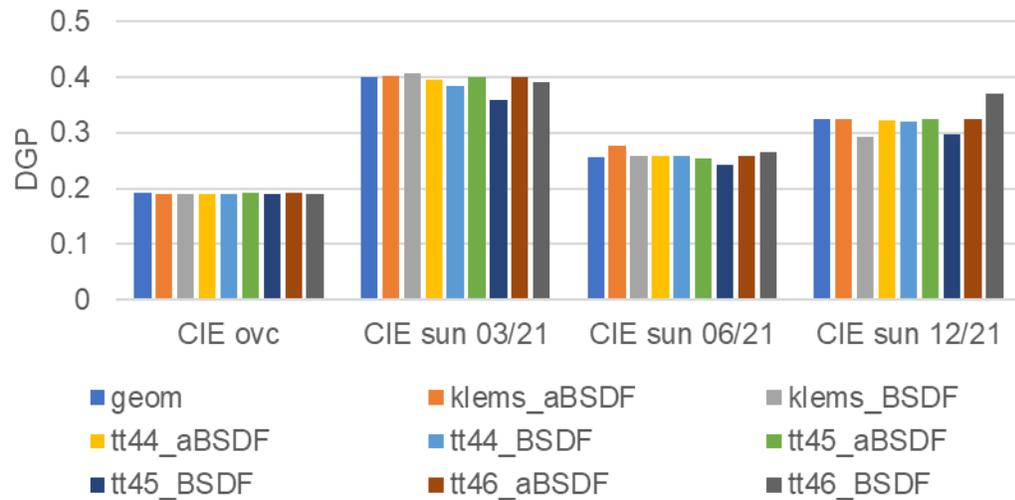

Glazing - Ev, View 02

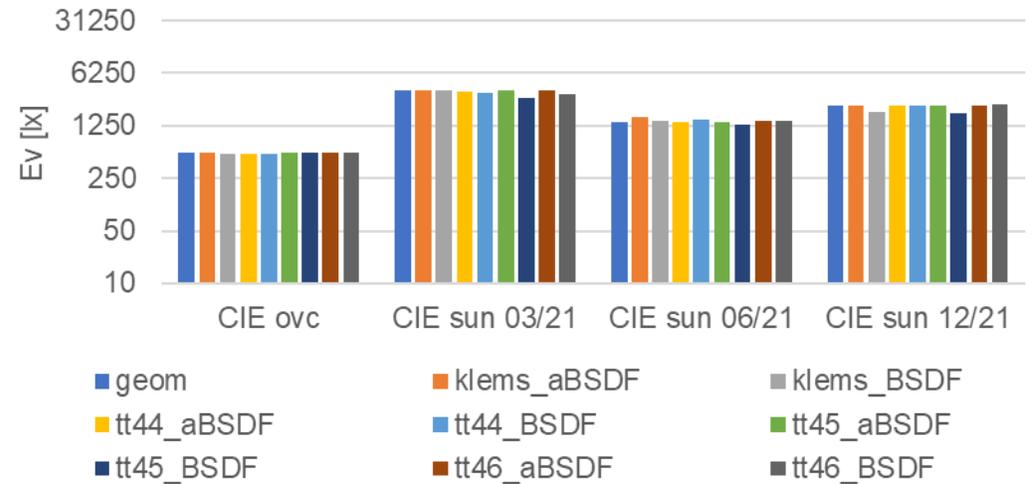




Sensitivity Analysis

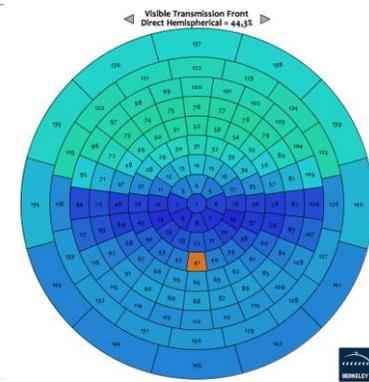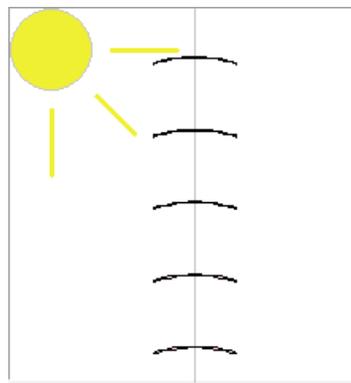


Blinds, 00deg tilt

CIE Sunny Sky
21 March, 10am


Innsbruck, Austria (47.3N / 11.4E)

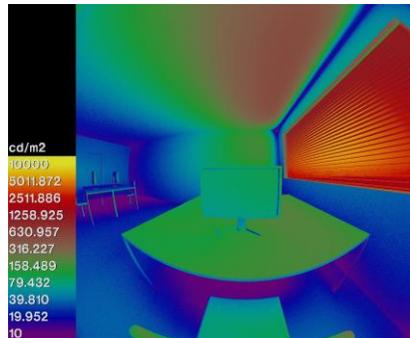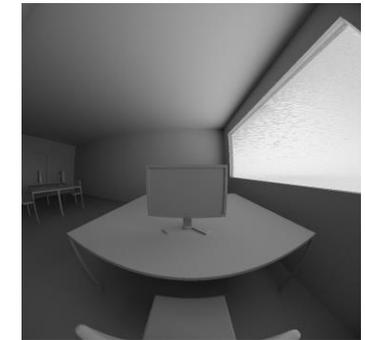


Geometry
Ev 1490 lx
DGP 0.26

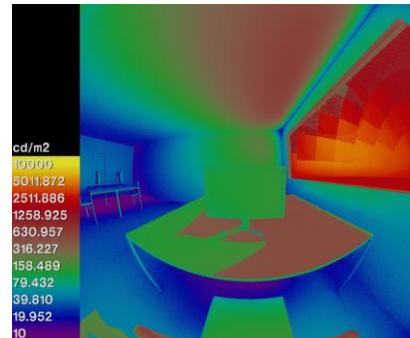


Klems aBSDF
Ev 3340 lx
DGP 0.59

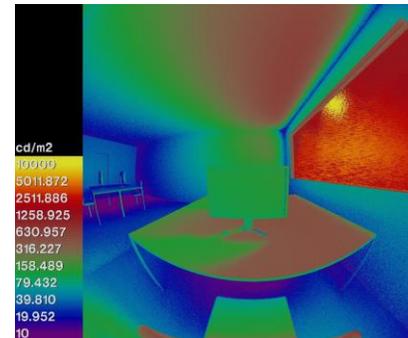

Klems BSDF
Ev 2650 lx
DGP 0.35

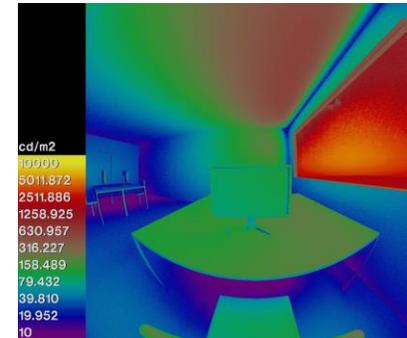

tt46 aBSDF
Ev 1530 lx
DGP 0.26

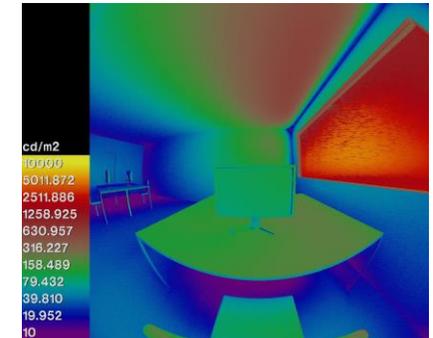

tt46 BSDF
Ev 1530 lx
DGP 0.26

Established data formats

name	input resolution	output resolution	currently used by software
WINDOW6 standard basis	Klems (145)	Klems (145)	WINDOW7, Relux, Radiance
IEA 21	Tregenza (145)	5deg full, i.e. 5°x5° (1297)	Relux, Radiance, Dialux
Shirley-Chiu	variable (limitation through data size)	variable (limitation through data size)	Radiance

XML file format

```
<?xml version="1.0" encoding="UTF-8"?>
<WindowElement xmlns="http://windows.lbl.gov" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  <WindowElementType>System</WindowElementType>
  <Optical>
    <Layer>
      <Material>
        <Name>DALEC_UL_00deg_1u2panes</Name>
        <Manufacturer>Bartenbach</Manufacturer>
        <Thickness unit="Meter">0.128</Thickness>
        <DeviceType>Integral</DeviceType>
      </Material>
    </Layer>
    <DataDefinition>
      <IncidentDataStructure>Columns</IncidentDataStructure>
      <AngleBasis>
        <AngleBasisName>LBNL/Klens Full</AngleBasisName>
        <AngleBasisBlock>
          <Theta>0</Theta>
          <nPhis>1</nPhis>
          <ThetaBounds>
            <LowerTheta>0</LowerTheta>
            <UpperTheta>5</UpperTheta>
          </ThetaBounds>
        </AngleBasisBlock>
        <AngleBasisBlock>
          <Theta>10</Theta>
          <nPhis>8</nPhis>
          <ThetaBounds>
            <LowerTheta>5</LowerTheta>
            <UpperTheta>15</UpperTheta>
          </ThetaBounds>
        </AngleBasisBlock>
      </AngleBasis>
    </DataDefinition>
  </Optical>
</WindowElement>
```



Venetian blinds

Task	Simulation method	System characterization / BSDF
Daylight Factor	Raytracing possibly mkillum continuous sky model	(a) Geometry (b) Low-res BSDF
Point-in-time illuminance for overcast / sunny sky	Raytracing continuous sky model	(a) Geometry (b) Low-res BSDF
Point-in-time glare metric for overcast / sunny sky	Raytracing peak extraction continuous sky model	(a) High-res BSDF (b) Low-res BSDF (with peak extraction)
Point-in-time rendering for overcast / sunny sky	Raytracing peak extraction continuous sky model	(a) High-res BSDF (b) Low-res BSDF if peak extraction
Annual illuminance metric	DC-method or 3-PM	Low-res BSDF
Annual glare metric	5-PM peak extraction	Low-res BSDF and (a) Geometry or (b) High-res BSDF or (c) Low-res BSDF (only if PE)

Work in progress...



Aim

The „right“ system data for

- Transparent systems¹
- Woven shades
- Venetian blinds
- Specular blinds / grids
- Micro-/Nano-structured systems
- Prisms, LCPs



¹ Clear / electrochromic glazing, films

Work in progress...



Task Force „Revision of ISO 10916“

Proposed new scope

- extend ISO 10916 to an hourly based (annual) estimation of the daylight supply in buildings
- based on location and local climate data
- include facades with and without shading systems
- allow to model different daylighting control strategies including linkage with electric lighting systems (e.g. indoor occupation sensing)
- appropriate interface with BACS formalism

The screenshot shows the ISO website interface. At the top, the ISO logo is on the left, and the text "International Organization for Standardization" and "When the world agrees" is on the right. Below this is a navigation bar with links for "Standards", "All about ISO", "Taking part", and "Store". A search bar is also present. Below the navigation bar, there is a breadcrumb trail: "Standards catalogue | Publications and products". The main content area shows the product page for "ISO 10916:2014" with a "Preview" button. The description below the title reads: "Calculation of the impact of daylight utilization on the net and final energy demand for lighting".


Acknowledgments



Funding through the project

FACEcamp n. ITAT1039

funded by European Regional Development Fund
and Interreg ITA AUT program

 **FACECAMP**

Interreg
Italia-Österreich

European Regional Development Fund



EUROPEAN UNION

and by the Federal Ministry of Austria for Transport,
Innovation and Technology through the project

„IEA SHC Task 61 / EBC Annex 77“

managed by the Austrian Research Promotion Agency
FFG is gratefully acknowledged.

 Federal Ministry
Republic of Austria
Transport, Innovation
and Technology



IEA FORSCHUNGS
KOOPERATION

SHC
SOLAR HEATING & COOLING PROGRAMME
INTERNATIONAL ENERGY AGENCY

EBC 
Energy in Buildings and
Communities Programme

cd/m²

10000

5011.872

2511.886

1258.925

630.957

316.227

158.489

79.432

39.810

19.952

10

